



FlashShield Termination
(No Flange) Fitting, FSTRM-XX-NF



Gastite Division
1116 Vaughn Parkway
Portland, TN 37148
Telephone 800-662-0208
www.gastite.com

Description

FlashShield™ is metallically shielded corrugated stainless steel tubing system complying with ANSI LC 1 "Fuel Gas Piping Systems Using CSST" and listed with CSA®, ICC and IAPMO. The FlashShield system is also listed to protective jacket standards, ICC-ES PMG LC1024, and LC1027. All mechanical tube fittings are SAE CA360 brass incorporating double wall flare sealing and Jacket-Bite™ jacket capturing for steel tubing protection and continuous conductivity.

Features:

- Termination Fitting with No Flange (male NPT adapter, bushing, termination nut)
- Approved for Concealed Use
- Tool-Less Flare Fitting Design
- Metal-to-Metal Seal
- Self-Guiding Fitting Assembly
- Patented Jacket-Bite™
- Fully Reusable Fitting
- Patent Pending Multi-Point Seal




Listings:

- CSA Certificate 2728525
- ICC-ES Report No. PMG 1066 and PMG 1155
- IAPMO: File No. C-3250 and Report No. 0239

Technical Data:

Max. Approved Operating Pressure	25 psi
Operating Temperature Range	-35°F to 160°F
Fitting Material	CA360

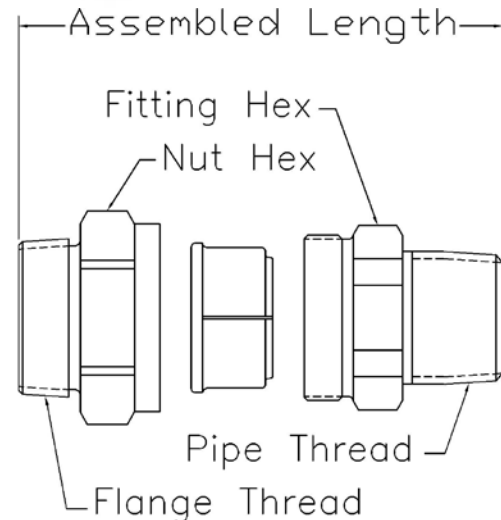

Dimensional Characteristics

Size	P/N	Pipe Thread	Flange Thread	Nut Hex	Fitting Hex	Assembly Torque (ft-lbs)	Weight (lbs.)
1/2"	FSTRM-8-NF	1/2"	3/4"	1-1/4"	1-1/8"	35	.35
3/4"	FSTRM-11-NF	3/4"	1"	1-9/16"	1-3/8"	45	.50
1"	FSTRM-16-NF	1"	1-1/4"	1-15/16"	1-3/4"	65	.78
1-1/4"	FSTRM-20-NF	1-1/4"	1-1/2"	2-3/16"	2-1/16"	95	1.06

FlashShield fittings can be used with Gastite and FlashShield CSST.