

Description (Sample Specification Language)

Gastite[®] is a corrugated stainless steel tubing complying with ANSI LC 1b "Fuel Gas Piping Systems Using CSST" and listed with CSA[®], ICBO and IAPMO. Manufacturing materials are: ASTM A240 type 300 corrugated stainless steel tubing with a minimum wall thickness of .010", jacketing of UV resistant polyethylene meeting the requirements of ASTM E84 for flame spread and smoke density. All mechanical tube fittings are SAE CA360 brass incorporating double wall flare sealing and Jacket Lock[™] jacket capturing for steel tubing protection.


Features:

- Quick & Easy Installation
- Required Tools: Tubing Cutter, Utility Knife, Wrenches
- Fewer Fittings, Less Waste
- Technical Support
- Approved for Concealed Use
- Tool-Less Flare Fitting Design
- Metal-to-Metal Seal
- Self-Guiding Fitting Assembly
- Patented Jacket-Lock[™]
- Fully Reusable Fitting
- Provides protection from puncture threats where tubing movement is restricted
- Protects protection from puncture threats when tubing passes through structural members



Applicable Standards & Listings:

- CSA: ANSI LC 1b "Fuel Gas Piping Systems Using Corrugated Stainless Steel Tubing"
- IAS: International Approval Services Certificate No. 188978-1009875
- ICBO: International Conference of Building Officials Report No. ER-5122
- IAPMO: International Association of Plumbing & Mechanical Officials - File No. C-3250

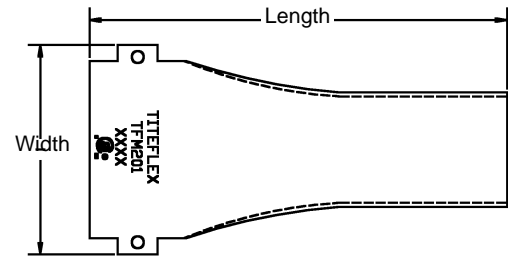

Technical Data:

General

Striker Plate Material	16 Gage Carbon Steel
Hardened to	Rc 45
Mounting Holes	Ø3/16"

Dimensional Characteristics

P/N	Length	Width	Tube Shape	Mounting Tabs	Weight (lbs)
TFM201	6-1/2"	3-1/4"	1 End	Y	0.31
TFM203	8"	3-1/4"	N	Y	0.40
TFM204	1-1/2"	3-1/4"	N	Y	0.08
TFM205	11-1/2"	3-1/4"	Both Ends	Y	0.55
TFM210	17"	6"	N	N	1.8

