

### Description (Sample Specification Language)

Gastite® is corrugated stainless steel tubing (CSST) complying with ANSI LC 1 "Fuel Gas Piping Systems Using CSST" and listed with CSA, ICC and IAPMO. The corrugated stainless steel tubing is protected by an electrically insulative polymer jacket.


### Features:

- Electrically insulative polymer cover
- Pre-Marked by the foot
- Lightweight & Flexible



### Listings:

- CSA Certificate 2728525
- ICC-ES Report No. PMG 1019
- IAPMO: Report No. 3250

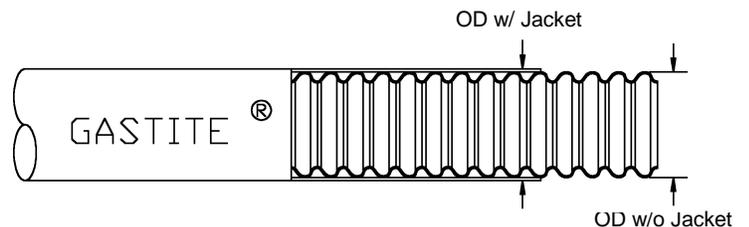

### Technical Data:

Maximum Operating Pressure	25 psi
Operating Temperature Range	-40°F to 160°F
Polymer Cover	UV resistant polymer, complying with requirements of ASTM E84 and CAN/ULC-S102.2 25/50
Polymer Material Melting Point	205° F
CSST Gas Vessel	ASTM A240 Type 304 SS

### Dimensional Characteristics

Size	P/N	EHD	Nominal OD (w/o jacket)	Nominal OD (w/ jacket)	Wall Thickness	Max Test Pressure (psi)
3/8"	S93-6A4	13	0.51"	0.56"	0.01"	150
1/2"	S93-8A4	19	0.72"	0.76"	0.01"	150
3/4"	S93-11B4	23	0.92"	0.98"	0.01"	150
1"	S93-16A4	31	1.26"	1.30"	0.01"	125
1-1/4"	S93-20A4	37	1.50"	1.55"	0.01"	100
1-1/2"	S93-24A4	47	1.75"	1.79"	0.01"	50
2"	S93-32A4	60	2.32"	2.40"	0.01"	40