

**Description (Sample Specification Language)**

Gastite® is a corrugated stainless steel tubing complying with ANSI LC 1 "Fuel Gas Piping Systems Using CSST" and listed with CSA®, ICC and IAPMO. Manufacturing materials are: ASTM A240 type 300 corrugated stainless steel tubing with a minimum wall thickness of .010", jacketing of UV resistant polyethylene meeting the requirements of ASTM E84 for flame spread and smoke density. All mechanical tube fittings are SAE CA360 brass incorporating double wall flare sealing and Jacket-Lock™ jacket capturing for steel tubing protection.

**Features:**

- Designed to Prevent the Passage of Fire through a Wall Assembly
- Quick & Easy Installation
- Approved for Concealed Use
- Metal-to-Metal Seal
- Self-Guiding Fitting Assembly
- Fully Reusable Fitting
- For Flush Mount "Fixed-Point" Termination of Appliances
- Kit Contains: XR2 Termination Fitting, Valve Box, Valve, Finish Plate, Mounting Brackets, Nut and Plug




**Applicable Standards & Listings:**

- CSA: Certificate No. 2728525
- ICC-ES: Report No. PMG 1019
- IAPMO: File No. C-3250
- ASTM E814 - 2 Hr (F), 116 Min (T) and 1 Hr (F), 50 Min (T)
- CAN/ULC S115 - 2 Hr (F/FH), 116 Min(FH/FTH) and 1 Hr (F/FH), 50 Min (FH/FTH)

**Technical Data:**

**General**

Max. Approved Operating Pressure	25 psi
Operating Temperature Range	-40°F to 205°F
Fitting Material	CA360

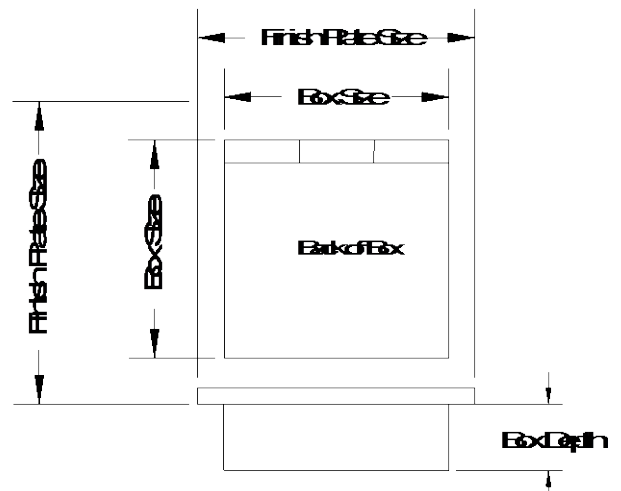

**Dimensional Characteristics**

Size	P/N	Pipe Thread	Nut Hex	Fitting Hex	Finish Plate Size (W x H)	Box Size (W x H)	Box Depth	Assembly Torque (ft-lbs)	Weight (lbs)
1/2"	XROUTLETBOX-FR8	1/2"	1-1/4"	1-1/8"	10-7/8" x 8-3/4"	8-1/4" x 7-1/8"	3-1/2"	35	3.75
3/4"	XROUTLETBOX-FR11	3/4"	1-1/2"	1-5/16"	10-7/8" x 8-3/4"	8-1/4" x 7-1/8"	3-1/2"	45	4.11