

**Description (Sample Specification Language)**

Gastite® is a corrugated stainless steel tubing complying with ANSI LC 1 "Fuel Gas Piping Systems Using CSST" and listed with CSA®, ICC and IAPMO. Manufacturing materials are: ASTM A240 type 300 corrugated stainless steel tubing with a minimum wall thickness of .010", jacketing of UV resistant polyethylene meeting the requirements of ASTM E84 for flame spread and smoke density. All mechanical tube fittings are SAE CA360 brass incorporating double wall flare sealing and Jacket-Lock™ jacket capturing for steel tubing protection.

**Features:**

- Quick & Easy Installation
- For Flush Mount "Fixed-Point" Termination of Appliances
- Kit Contains: XR2 Termination Fitting, Valve Box, Valve, Finish Plate, Bracket, Nut and Plug




**Listings:**

- CSA: Certificate No. 1009875
- ICC-ES: Report No. PMG 1019
- IAPMO: File No. C-3250

**Technical Data:**

**General**

Max. Approved Operating Pressure	5 psi
Operating Temperature Range	-40°F to 205°F
Fitting Material	CA360

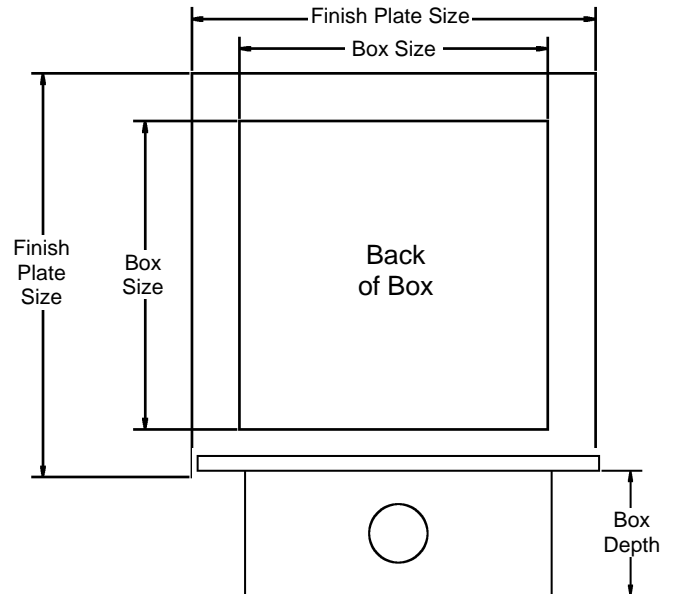

**Dimensional Characteristics**

Size	P/N	Pipe Thread	Nut Hex	Fitting Hex	Finish Plate Size	Box Size	Box Depth	Assembly Torque (ft-lbs)	Weight (lbs)
1/2"	XR2OUTLETBOX-8	1/2"	1-1/4"	1-1/8"	6-13/16"	5-3/16"	2-1/8"	35	1.54
3/4"	XR2OUTLETBOX-11	3/4"	1-1/2"	1-5/16"	8-1/2"	6-1/2"	3"	45	2.19